

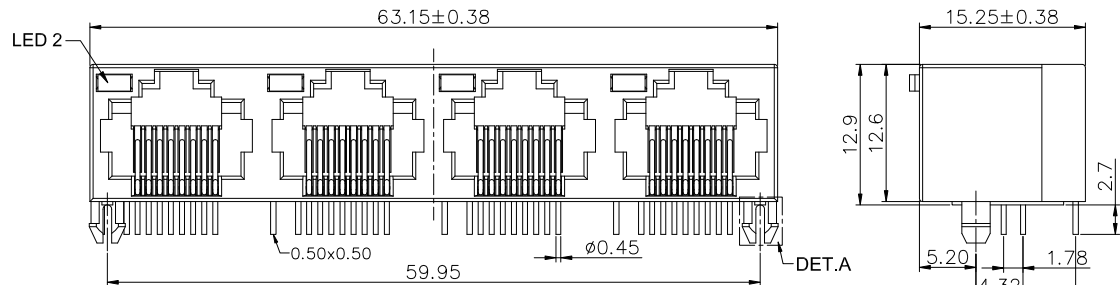
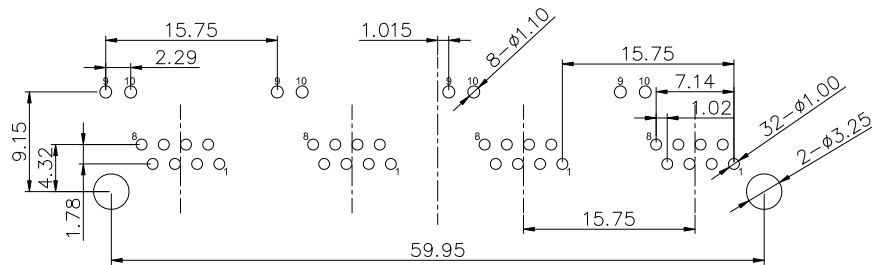



7	8
REV:	ECN. NO.
NAME	DATE

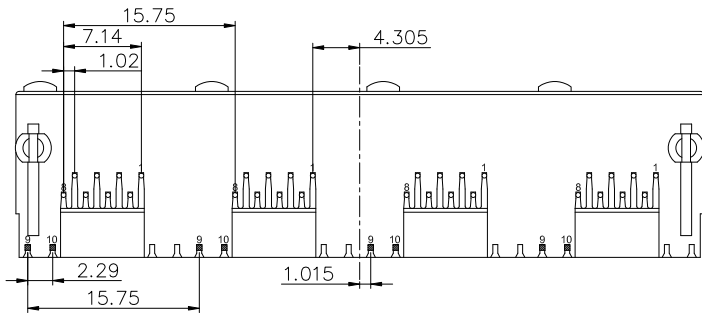


Electrical Characteristics :
 Insulation Resistance : 500MΩ Min.
 Contact Resistance : 30mΩ Max.
 Withstand Voltage : 1000 VAC 1 minute.
 Current Rating : 1.5A
 Housing Color: Black
 Gold Plated: Fu"



RECOMMENDED PCB LAYOUT
 TOP VIEW
 TOLERANCE: ±0.05mm
 PCB THICKNESS: 1.60±0.05mm

RoHS Compliant

TOLERANCE UNSPECIFIED		 VITALCON a vital connector company		FOR YOUR VITAL CONNECTION	
.0	±0.38			TITLE: RJ45 , Unshielded , Receptacle, Horizontal , 1x4 Ports , Tht	
.00	±0.25	DRAWN BY: Zou Long		PART NO: JU142AW1UPC7	
.000	±0.10	CHECKED BY: Bob		REV: A	
ANGLE ±3.00°		APPROVED BY: QPF		SIZE: A4	
MANUFACTURING COPY		PROJECTION		UNIT:mm	
				SHEET: 1 OF 1	
				FCN: C7	
				http://www.vitalconn.com	

NO.	NAME	MATERIAL	FINISH
2	Spring Wire	Copper Alloy	Gold Plated
1	Housing	Thermoplastic	