


REV:	ECN. NO.	NAME	DATE

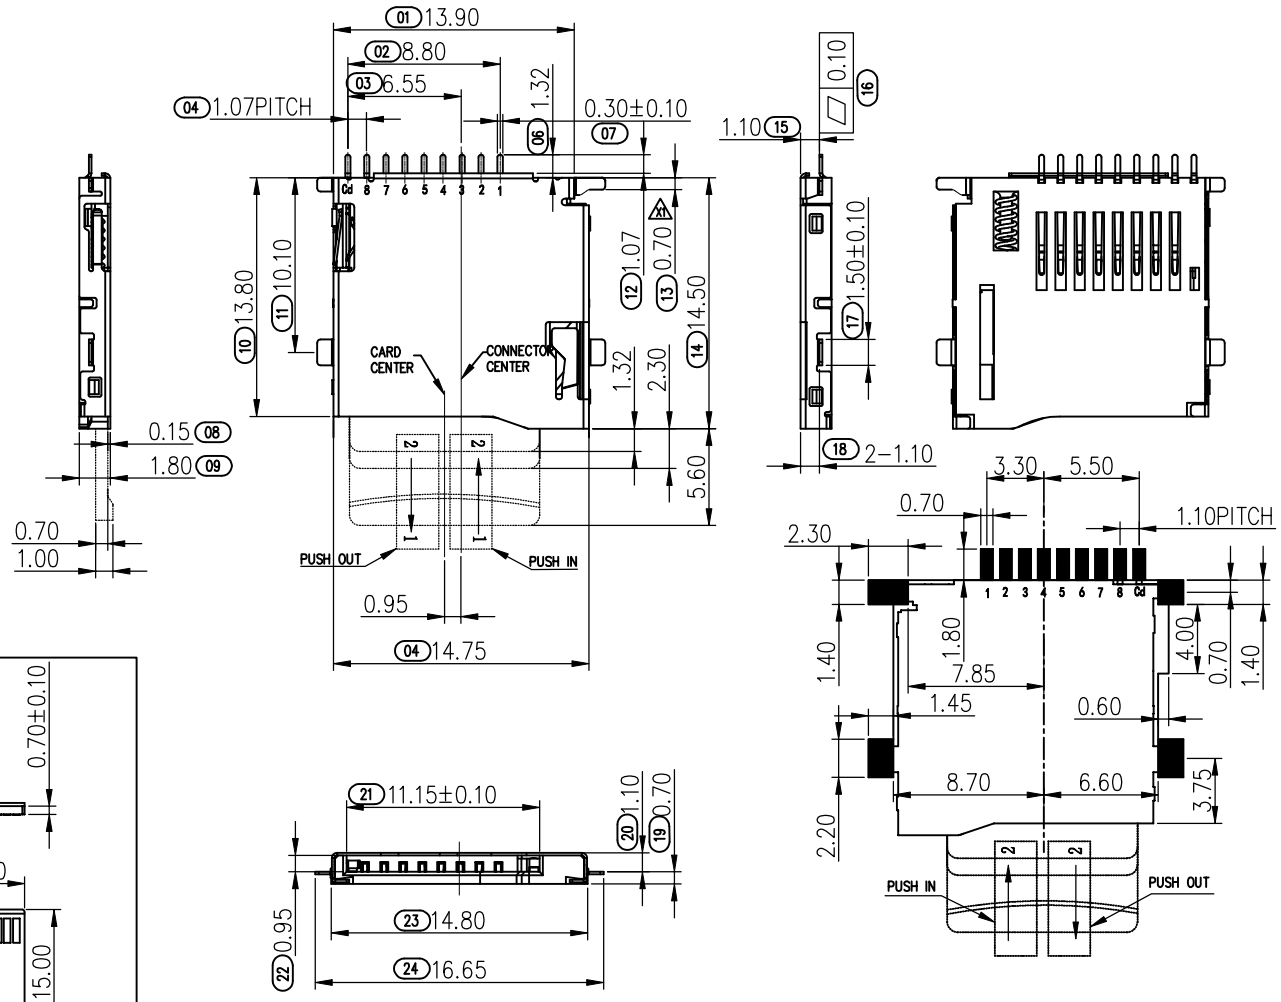

Specification


Material
 Plastic Housing: LCP 30%GF. UL94V-0, Black
 Contact Terminal: Phosphor Bronze. T=0.15mm
 Cover: SUS304, T=0.15mm

Plating:
 Contact Terminal
 Contact Area: Gold Flash
 Solder area: Tin 80u" min.
 Underplating: Ni overall 50u" min.
 Cover: Ni overall 30u" min.

Electrical
 Voltage Rating: 30V max.
 Current Rating: 0.5A max.
 Dielectric Withstanding Voltage: 100V AC (60 Sec min.)
 Insulation Resistance: 1000 MΩ min.
 Contact Resistance: 100 mΩ max.

Mechanical & Environmental
 Operating Temperature: -40°C to +85°C
 Durability: 5000 cycles


RoHS Compliant

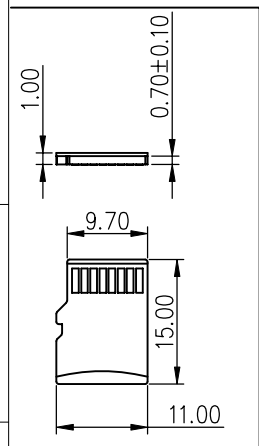

T-Flash

For technical support, please send an email to support@vitalconn.com

PIN NO.	NAME	TYPE	DESCRIPTION
1	DAT2	I/O/PP	DATE LINE(BIT2)
2	CD/DAT3	I/O/PP	CARD DETECT DATE LIN(BIT3)
3	CMD	PP	COMMAND RESPONSE
4	VDD	S	SUPPLY VOLTAGE
5	CLX	I	CLOCK
6	VSS	S	SUPPLY VOLTAGE GROUND
7	DATO	I/O/PP	DATE LINE(BIT0)
8	DAT1	I/O/PP	DATE LINE(BIT1)

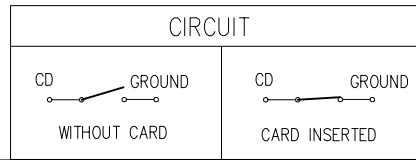


TOLERANCE UNSPECIFIED	
.0	±0.38
.00	±0.25
.000	±0.10
ANGLE	±3.00°
MANUFACTURING COPY	



FOR YOUR VITAL CONNECTION


TITLE:	TF PUSH 反向沉板1.10(SMT四个脚)
DRAWN BY:	QSY
CHECKED BY:	VIT
APPROVED BY:	QPF
PART NO:	VTC102012202
SIZE: A4	UNIT:mm
PROJECTION	
REV: A	SHEET: 2 OF 2
FCN: E1	http://www.vitalconn.com

REV:	ECN. NO.	NAME	DATE				


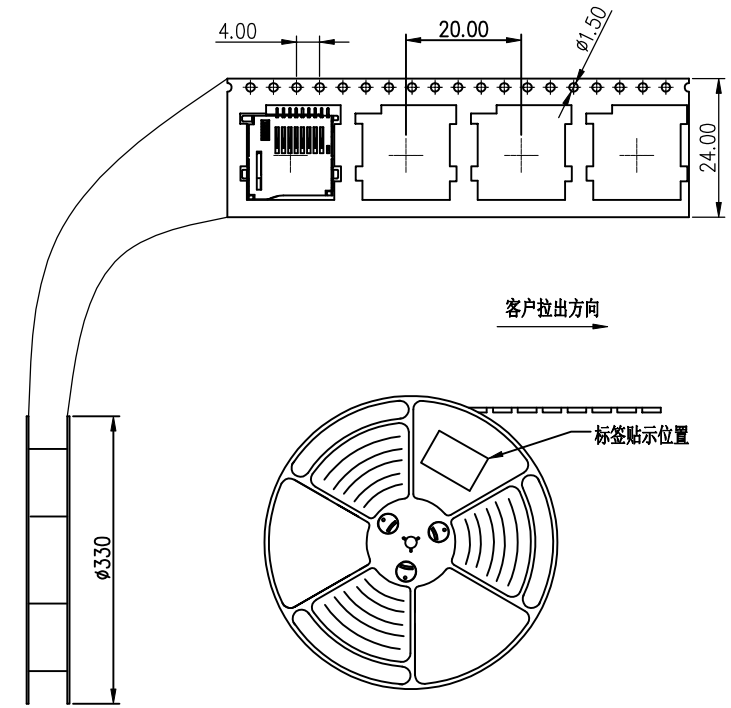


NOTES

1. 每卷包装数量:1000PCS/每卷
2. 卷带包装方式:

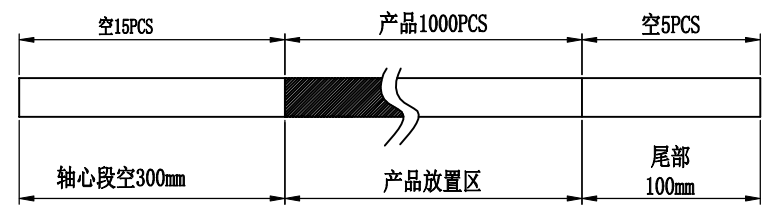

3. 每箱包装数量:10000PCS/箱

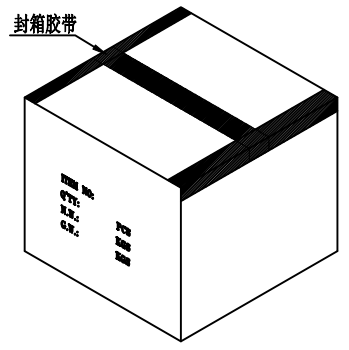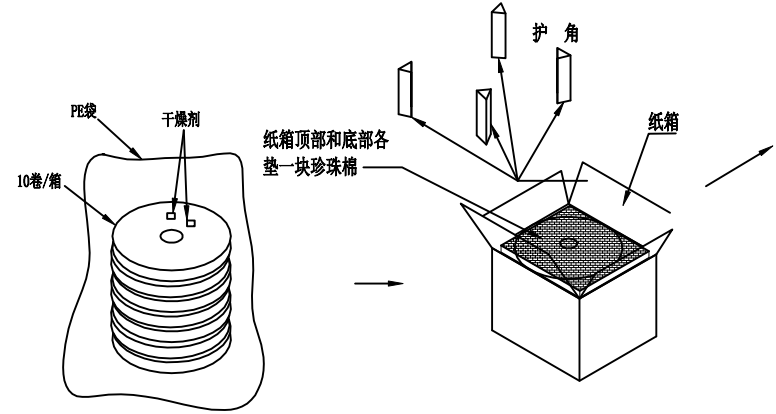

RoHS Compliant

TOLERANCE UNSPECIFIED	
.0	±0.38
.00	±0.25
.000	±0.10
ANGLE	±3.00°
MANUFACTURING COPY	



FOR YOUR VITAL CONNECTION

DRAWN BY: QSY		PART NO: VTC102012202		REV: A	
CHECKED BY: VIT		SIZE: A4	UNIT:mm	SHEET: 2 OF 2	FCN: E1
APPROVED BY: QPF		PROJECTION		http://www.vitalconn.com	

For technical support, please send an email to support@vitalconn.com