

REV:	ECN. NO.	NAME	DATE

Specification




Material  
 Plastic Housing: LCP 30%GF. UL94V-0, Black  
 Contact Terminal: Phosphor Bronze. T=0.15mm  
 Cover: SUS304, T=0.15mm

Plating:  
 Contact Terminal  
 Contact Area: Gold Flash  
 Solder area: Tin 80u" min.  
 Underplating: Ni overall 30u" min.  
 Cover: Ni overall 30u" min.


Electrical  
 Voltage Rating: 30V max.  
 Current Rating: 0.5A max.  
 Dielectric Withstanding Voltage: 100V AC (60 Sec min.)  
 Insulation Resistance: 1000 MΩ min.  
 Contact Resistance: 100 mΩ max.

Mechanical & Environmental  
 Operating Temperature: -40°C to +85°C  
 Durability: 5000 cycles

RoHS Compliant

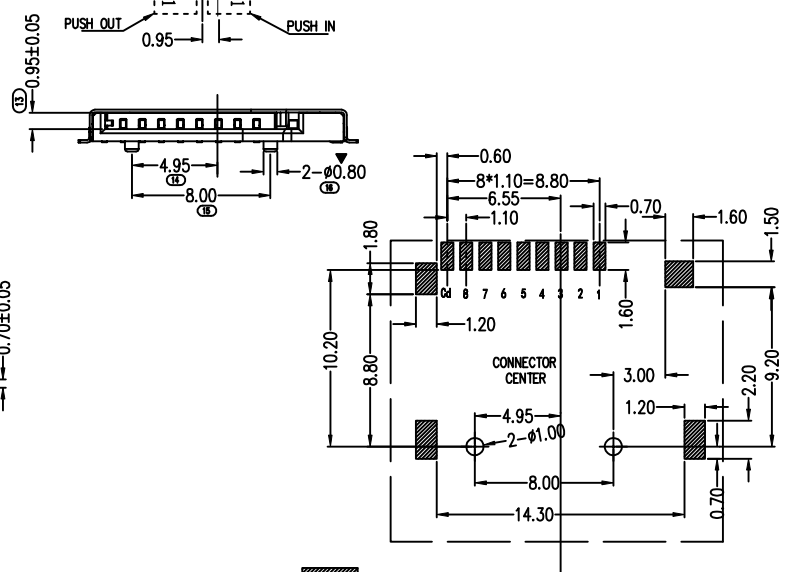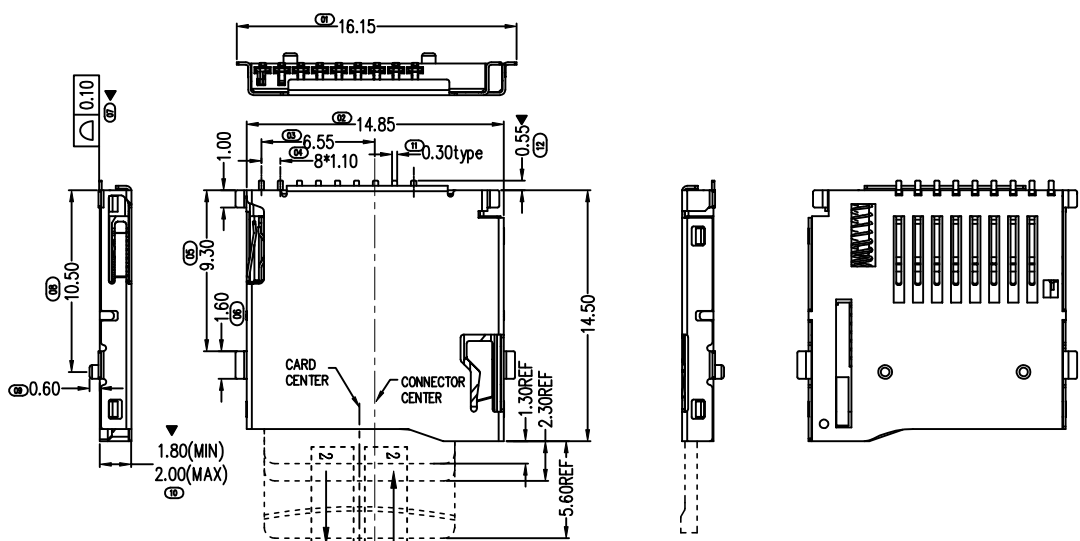


RECOMMENDED P.C.B HOLE LAYOUT  
 COMPONENT SIDE VIEW(TOLERANCE: +/-0.05)

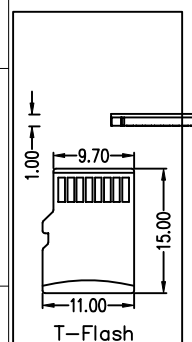

PIN NO.	NAME	YTYPE	DESCRIPTION
1	DAT2	I/O/PP	DATE LINE(BIT2)
2	CD/DAT3	I/O/PP	CARD DETECT DATE LIN(BIT3)
3	CMD	PP	COMMAND RESPONSE
4	VDD	S	SUPPLY VOLTAGE
5	CLX	I	CLOCK
6	VSS	S	SUPPLY VOLTAGE GROUND
7	DATO	I/O/PP	DATE LINE(BIT0)
8	DATI	I/O/PP	DATE LINE(DIT1)


For technical support, please send an email to support@vitalconn.com

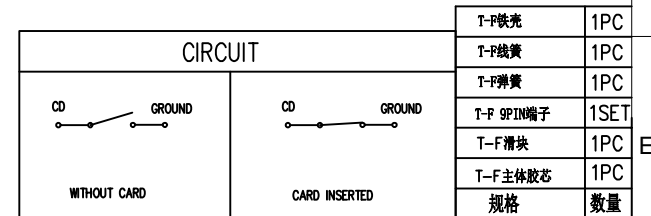


FOR YOUR VITAL CONNECTION

TOLERANCE UNSPECIFIED		TITLE:		T-FLASH 外焊卡座(卷装)	
.0	±0.38	DRAWN BY: QSY		PART NO: VTC102010052	
.00	±0.25	CHECKED BY: VIT		UNIT:mm	SHEET:2 OF 2
.000	±0.10	APPROVED BY: QPF		SIZE: A4	FCN: E1
ANGLE ±3.00°	MANUFACTURING COPY	PROJECTION		http://www.vitalconn.com	

REV:	ECN. NO.	NAME	DATE

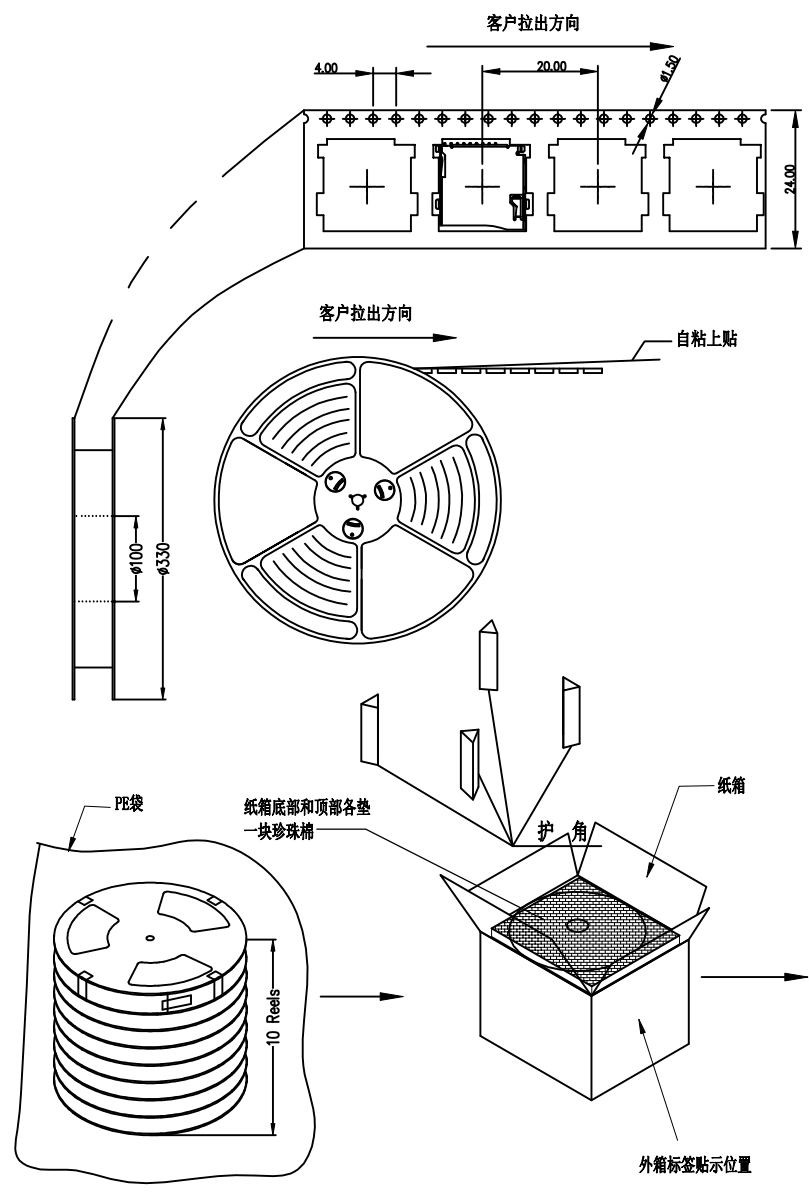

NOTES  
 1. 每卷包装数量: 1000PCS/每卷  
 2. 卷带包装方式:

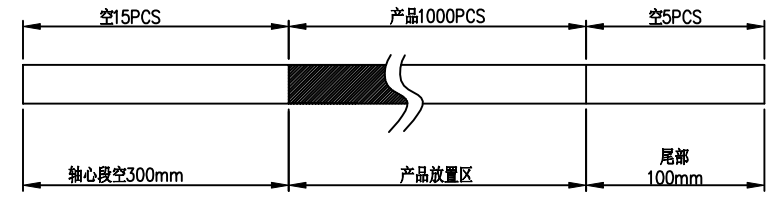

3. 每箱包装数量: 10000PCS/箱  
 4. 纸箱350mm\*350mm\*340mm (内部尺寸), 材质K=K  
 5. 10K/箱产品净重: 5.496kg, 毛重: 10.73kg

RoHS Compliant

TOLERANCE UNSPECIFIED		 a vital connector company		FOR YOUR VITAL CONNECTION	
.0	±0.38			TITLE: T-FLASH 外焊卡座(卷装)	
.00	±0.25	PART NO: VTC102010052		REV: A	
.000	±0.10	SIZE: A4		UNIT:mm	
ANGLE ±3.00°		SHEET: 2 OF 2		FCN: E1	
MANUFACTURING COPY		PROJECTION		http://www.vitalconn.com	
DRAWN BY: QSY	CHECKED BY: VIT	APPROVED BY: QPF			

For technical support, please send an email to support@vitalconn.com