





REV:	ECN. NO.	NAME	DATE

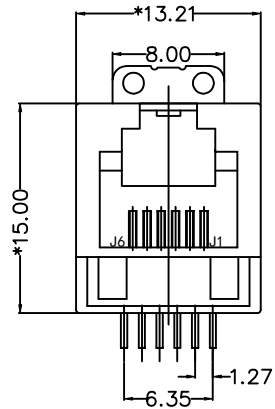

FRONT VIEW

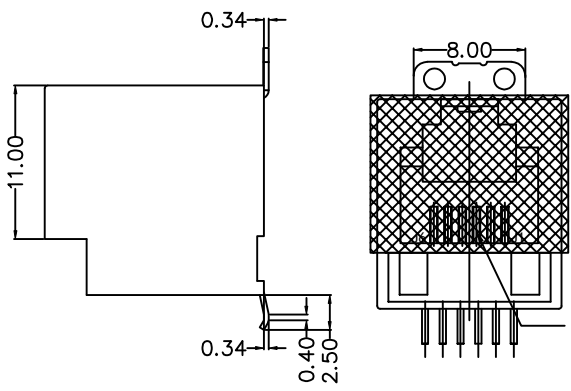


RIGHT SIDE VIEW

MATERIAL:
 HOUSING: PA9T,UL94V-0,BLACK.
 TERMINAL: PHOSPHOR BRONZE T=0.30MM.
 6U" GOLD PLATING ON CONTACT AREA.


MACHANICAL:
 DURABILITY: 750 CYCLES MIN,12.5MM/MINUTE.
 INSERTION FORCE: 2.2KG.F MAX.
 RETENTION STRENGTH : 7.7KG.F BETWEEN JACK AND PLUG.
 OPERATING TEMPERATURE: -40°C~+85°C.
 STORAGE TEMPERATURE: -40°C~+85°C.
 ALL CRITICAL DIMENSIONS WITH "**"

ELECTRICAL:
 VOLTAGE: 125 VOLTS AC.
 CURRENT RATING : 1.5AMP.
 DIELECTRIC STRENGTH: 1000 VAC RMS 50HZ OR 60HZ,1 MIN.
 INSULATION RESISTANCE: 500 MEGA OHMS MIN. INITIAL
 AFTER 500V DC FOR 1 MINUTE.
 CONTACT RESISTANCE: SINGLE TERMINAL 30 MILLIOHMS MAX.
 INITIAL 50 MILLIOHMS MAX. AFTER
 DURABILITY TEST.


麦拉



BOTTOM VIEW

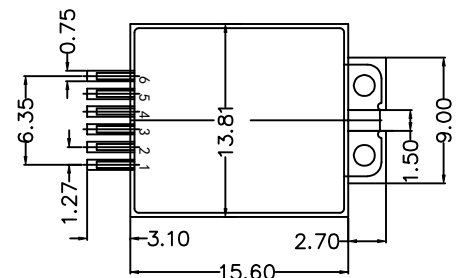

RECOMMENDED PCB LAYOUT
 VIEWED FROM COMPONENT SIDE

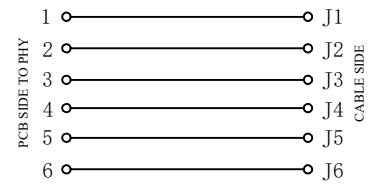

TOLERANCE UNSPECIFIED	
.0	±0.38
.00	±0.25
.000	±0.10
ANGLE	±2.00°
MANUFACTURING COPY	



FOR YOUR
 VITAL CONNECTION

TITLE:	180 TAB-UP SMT 6P6C		
--------	---------------------	--	--

DRAWN BY:	QSY	PART NO:	JV110503U9A0	REV: A
-----------	-----	----------	--------------	--------

CHECKED BY:	VIT	SIZE: A4	UNIT:mm	SHEET: 1 OF1	FCN: A0
-------------	-----	----------	---------	--------------	---------

APPROVED BY:	QPF	PROJECTION		http://www.vitalconn.com
--------------	-----	------------	--	---

For technical support, please send an email to support@vitalconn.com