

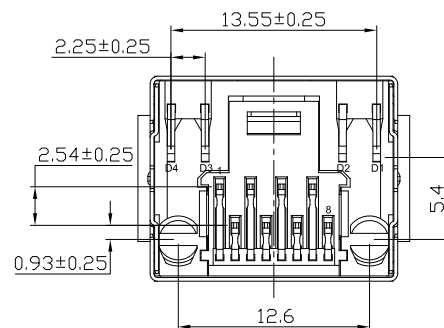


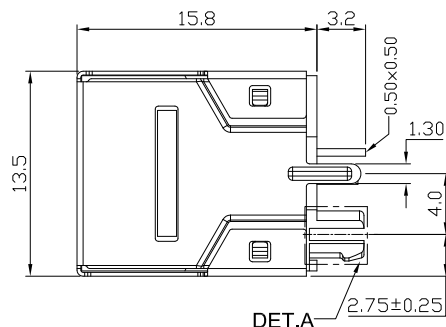





REV:	ECN. NO.	NAME	DATE
A0	----	-----	04-22-2026

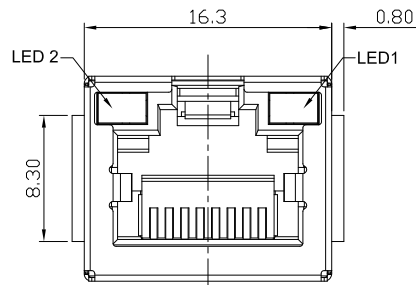

Electrical Characteristics :
Insulation Resistance : 500MΩ Min.
Contact Resistance : 50mΩ Max.
Withstand Voltage : 1000 VAC 1 minute.
Current Rating : 1.5A

Material:
Housing: PBT UL94V-0
Contact : Selective Gold Plating
Terminal: 0.35mm Thickness Phosphor Bronze
Plated With Gold And Tin In Solder Area.
Shell: SUS,Nickel Plated

PART NO : JV11415XNPC7

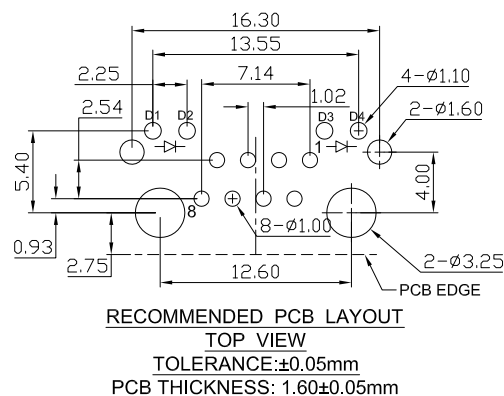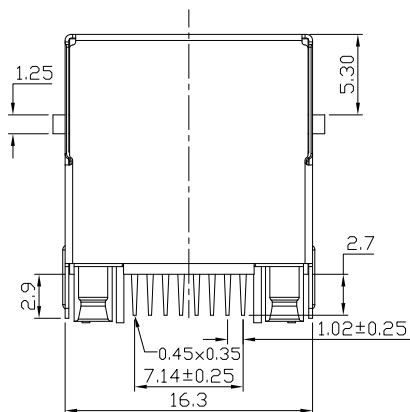

Gold Plated
1 : 6u"
2 : 15u"
3 : 30u"
4 : 50u"
5 : Gold Flash

LED ELECTRICAL CHARACTERISTIC			
LED2	Green	LED1	Green
D1	D2	D3	D4

TOLERANCE(公差):
0.000 mm ± 0.075 mm
0.00 mm ± 0.15 mm
0.0 mm ± 0.25 mm

VITALCON
a vital connector company

FOR YOUR
VITAL CONNECTION

TITLE: RJ45 , Shielded , Receptacle
Vertical , Single Port , Tht , With LED

For technical support, please send an email to support@vitalconn.com

DRAWN BY:	Zou Long	PART NO:	JV11415XNPC7	SHEET:	1 OF 1	REV:	A0
CHECKED BY:	Bob	DWG NO:	VTC-TZ-00182	SIZE:	A4	UNIT:	mm
APPROVED BY:	QPF	PROJECTION:		http://www.vitalconn.com			