





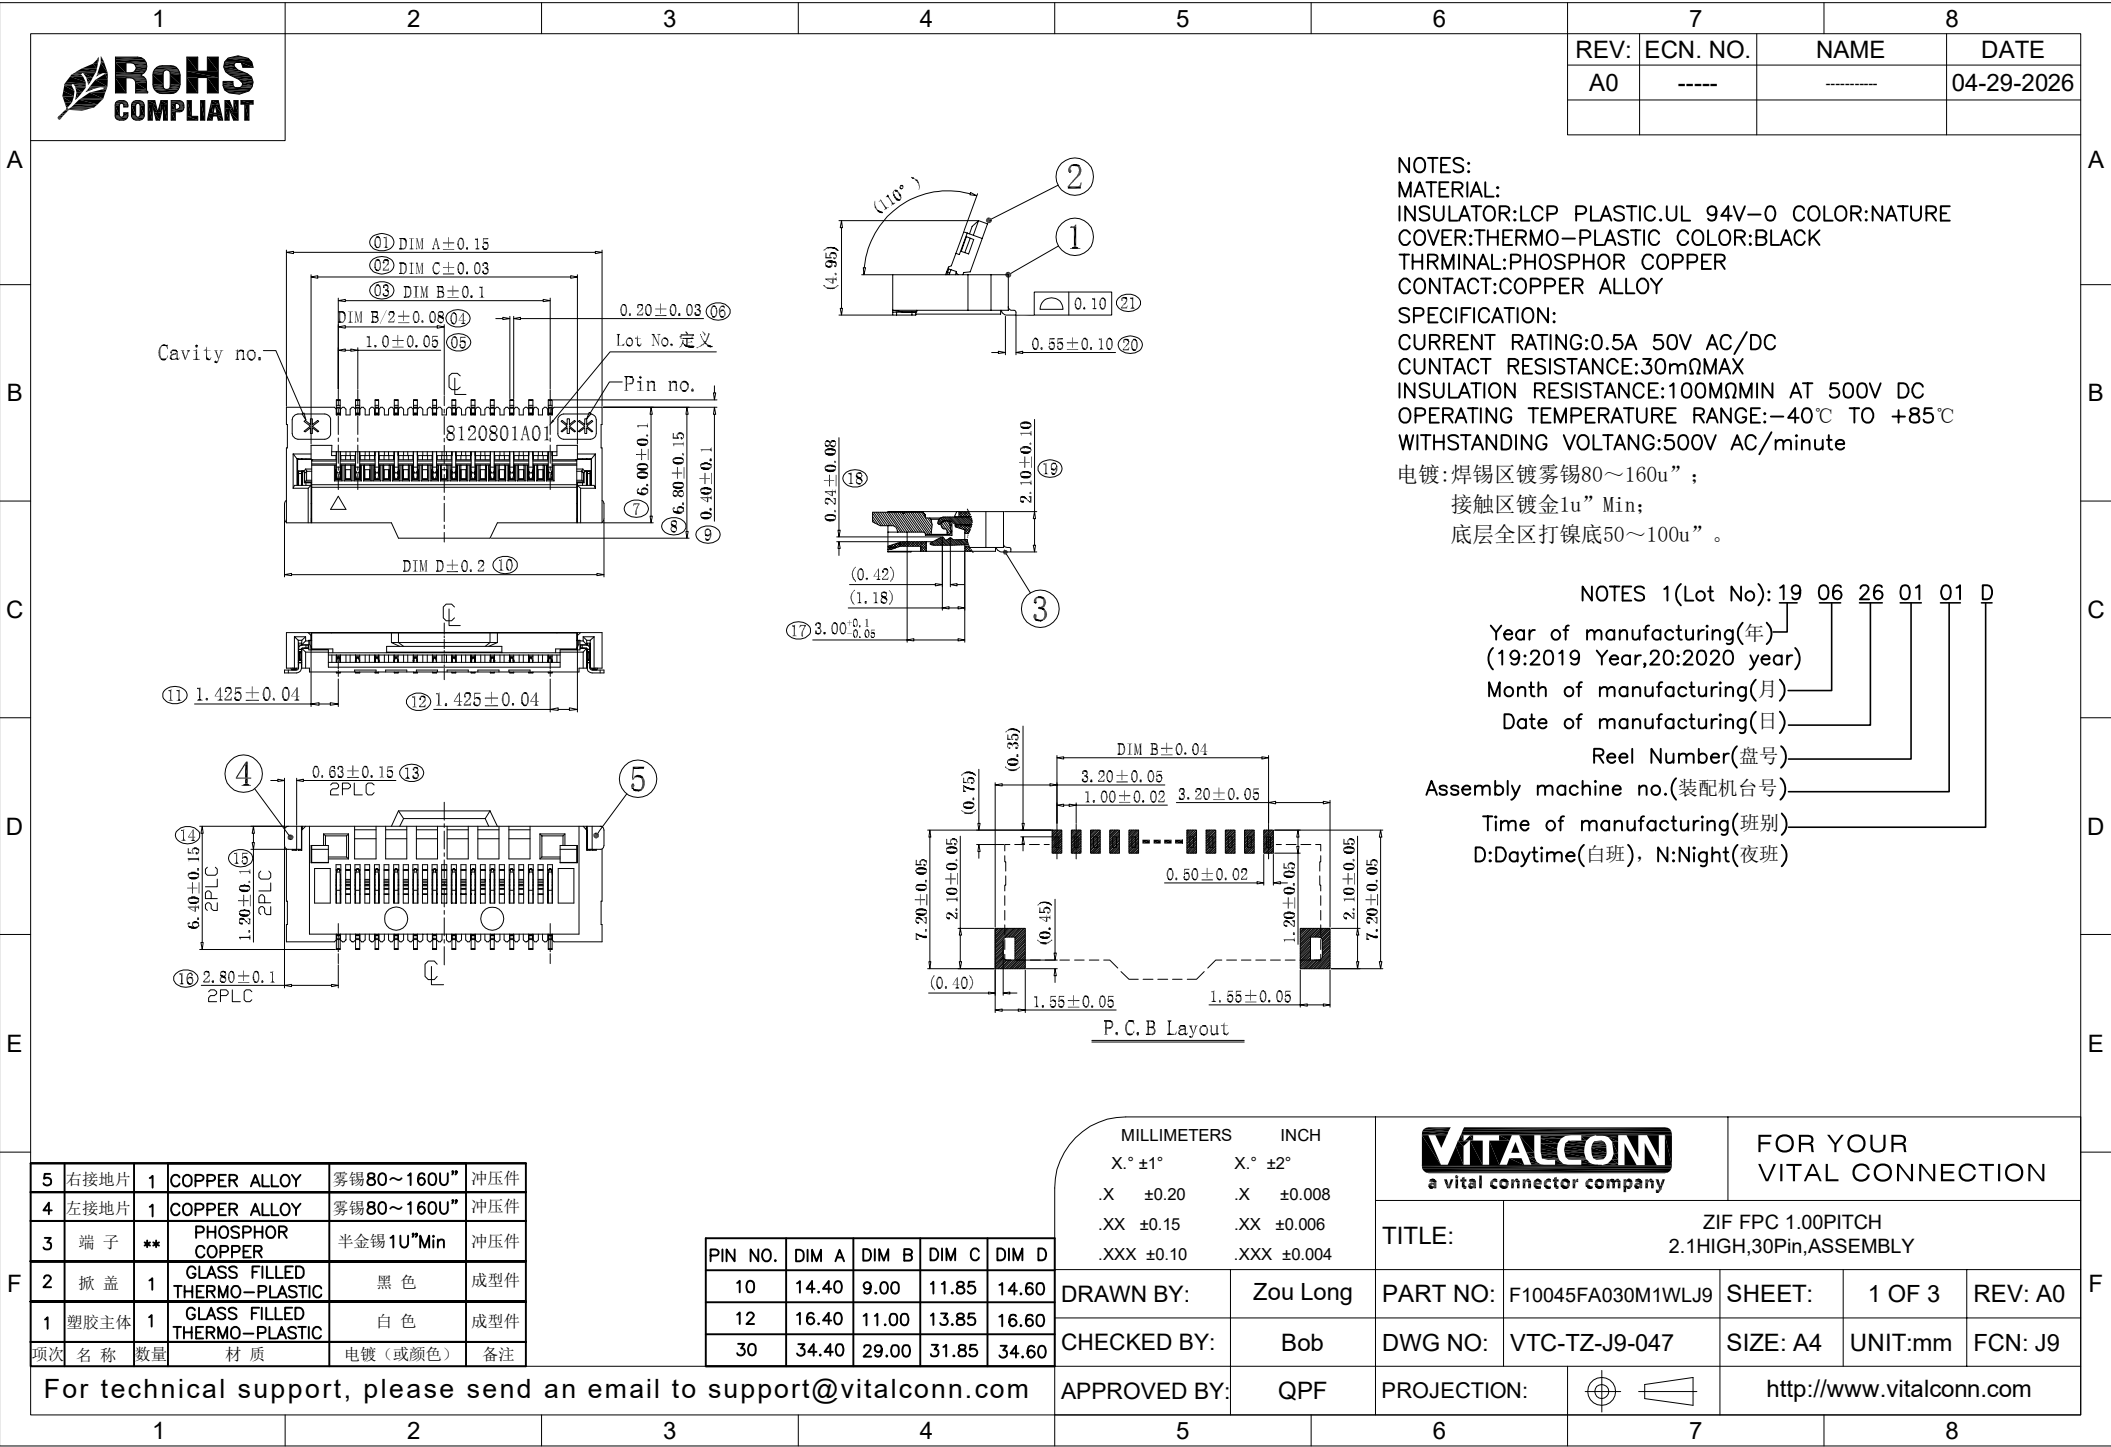

REV:	ECN. NO.	NAME	DATE
A0	----	-----	04-29-2026

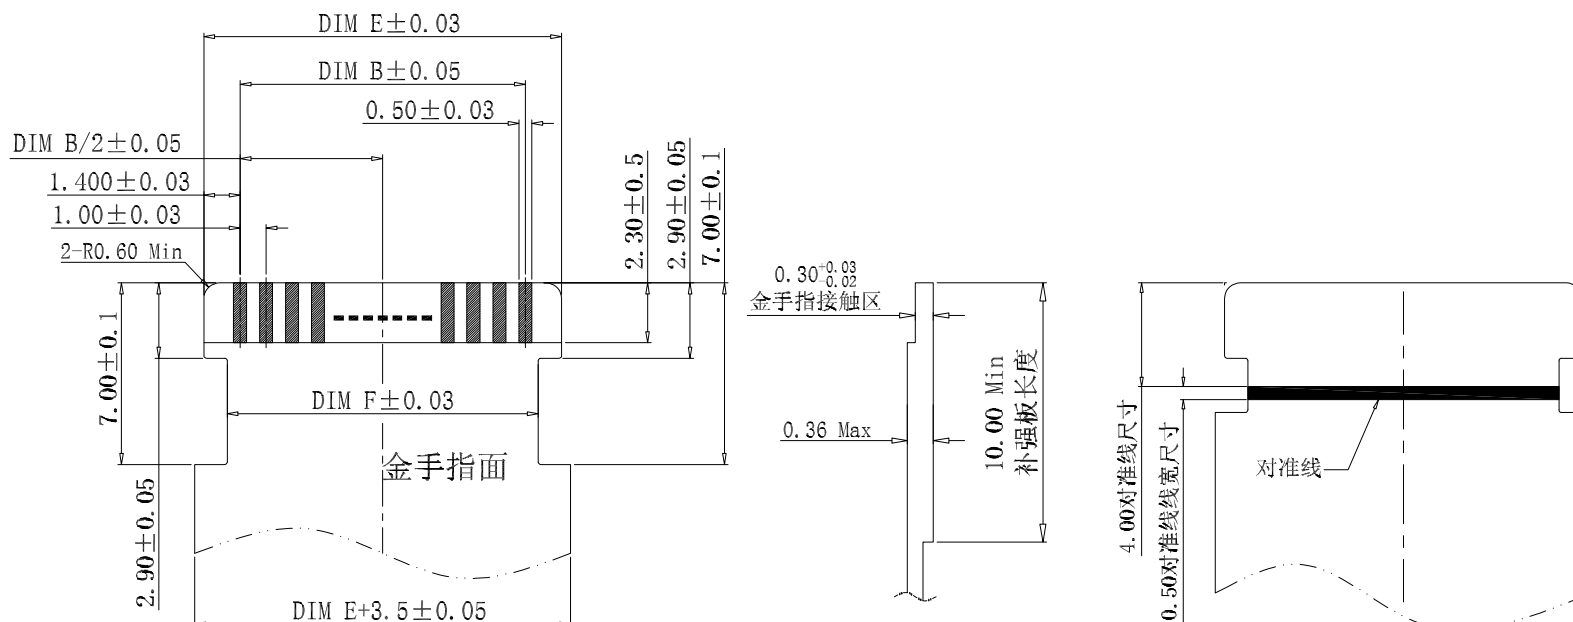

APPLICABLE FPC RECOMMENDED DIMENSION
蓝白裸线

PIN NO.	DIM B	DIM E	DIM F
10	9.00	11.80	10.00
12	11.00	13.80	12.00
30	29.00	31.85	30.00

MILLIMETERS	INCH
X.° ±1°	X.° ±2°
.X ±0.20	.X ±0.008
.XX ±0.15	.XX ±0.006
.XXX ±0.10	.XXX ±0.004




FOR YOUR
VITAL CONNECTION

TITLE:	ZIF FPC 1.00PITCH 2.1HIGH,30Pin,ASSEMBLY			
DRAWN BY:	Zou Long	PART NO:	F10045FA030M1WLJ9	SHEET: 2 OF 3
CHECKED BY:	Bob	DWG NO:	VTC-TZ-J9-047	REV: A0
APPROVED BY:	QPF	SIZE: A4	UNIT:mm	FCN: J9
PROJECTION:		http://www.vitalconn.com		

For technical support, please send an email to support@vitalconn.com



REV:	ECN. NO.	NAME	DATE
A0	----	-----	04-29-2026

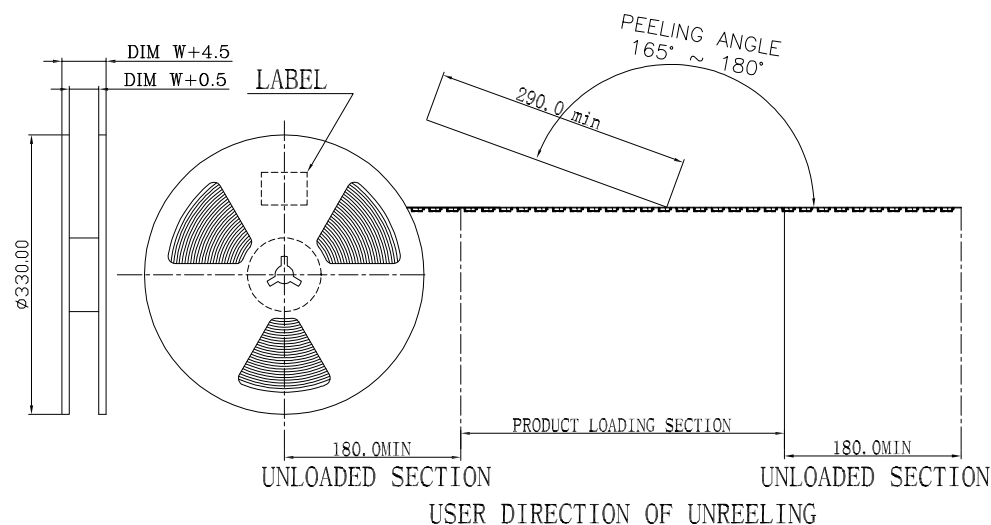

NOTES:

1. MATERIAL:

BOX: FIBREBOARD, CORRUGATED, DOUBLE WALL, (BURSTING STRENGTH:

19Kgf/cm², EDGE CRUSH STRENGTH: 44 LB)

TAPE: POLYSTYRENES, TRANSPARENT COLOR.

REEL: POLYSTYRENES, BLUE COLOR

BAG: POLYETHYLENE,

2. PACKAGING MATERIAL IN PLASTIC, RUBBER, INK, PIGMENT AND PAINT MUST

MEET CONTROLLED SUBSTANCES SPEC PER 230-702.

CADMIUM AND CADMIUM COMPOUNDS NOT TO EXCEED 5 PPM.



LEAD, CADMIUM, CHROM VI AND MERCURY NOT TO EXCEED 100 PPM (COMBINED).

3. EACH BAG SHALL BE INCLUDED DESICCANT.

4. CARRIER TAPES, COVER TAPES, REELS AND TAPED COMPONENTS MUST MEET THE REQUIREMENTS DEFINED PER EIA-481-C.

5. PEELING STRENGTH: 0.1 ~ 1.3 N (10 ~ 130 GRAMS)

6. PEELING SPEED: 300 mm/min.

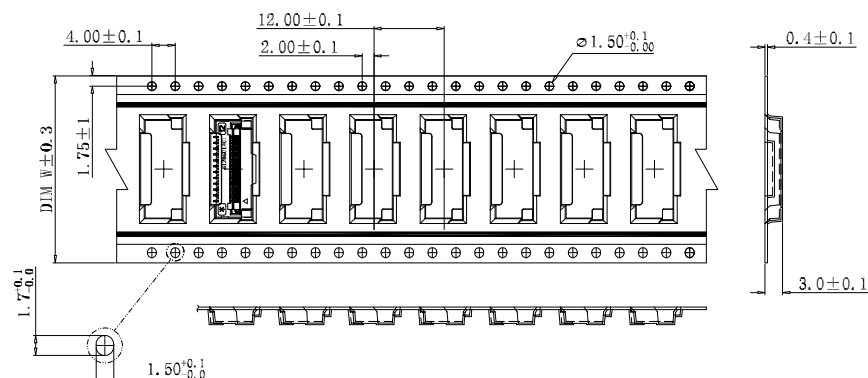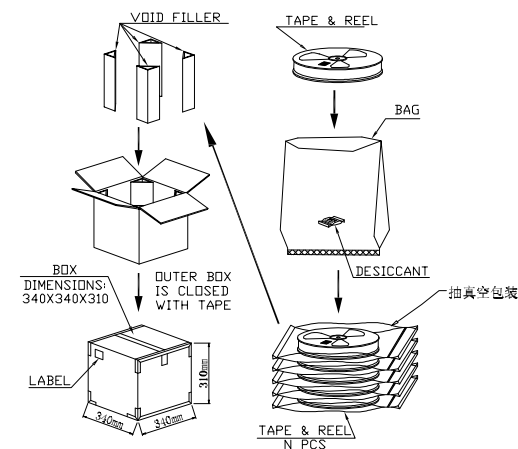

PIN NO.	PCS/REEL	PCS/BOX	DIM W
10	2000	16000	32
12	2000	16000	32
30	2000	10000	56

For technical support, please send an email to support@vitalconn.com

MILLIMETERS

X.° ±1° X.° ±2°

.X ±0.20 .X ±0.008

.XX ±0.15 .XX ±0.006

.XXX ±0.10 .XXX ±0.004



FOR YOUR
VITAL CONNECTION

TITLE:

ZIF FPC 1.00PITCH
2.1HIGH, 30Pin, ASSEMBLY

DRAWN BY: Zou Long

PART NO: F10045FA030M1WLJ9

SHEET:

3 OF 3

REV: A0

CHECKED BY: Bob

DWG NO: VTC-TZ-J9-047


SIZE: A4

UNIT: mm

FCN: J9

APPROVED BY: QPF

PROJECTION:



<http://www.vitalconn.com>